

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WHEREWITH IS NOT TO BE REPRODUCED. USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF ESL.

NOTES:

1. COMPLETE ASSEMBLY IS UL LISTED AS A MANUAL TRANSFER SWITCH UNDER UL 1008 (TRANSFER SWITCH STANDARD)
2. STANDARD UNIT IS NON-SWITCHED NEUTRAL. FOR SWITCHED NEUTRAL PLEASE CONSULT FACTORY
3. FINISH: POWDER COATED SERIES W49.
4. OPTIONAL PLUG KITS AVAILABLE
5. TYPE 3R CONSTRUCTION
6. NOT FOR INDOOR USE
7. FOAM SEAL INSIDE OF ALL CONDUIT ENTRIES



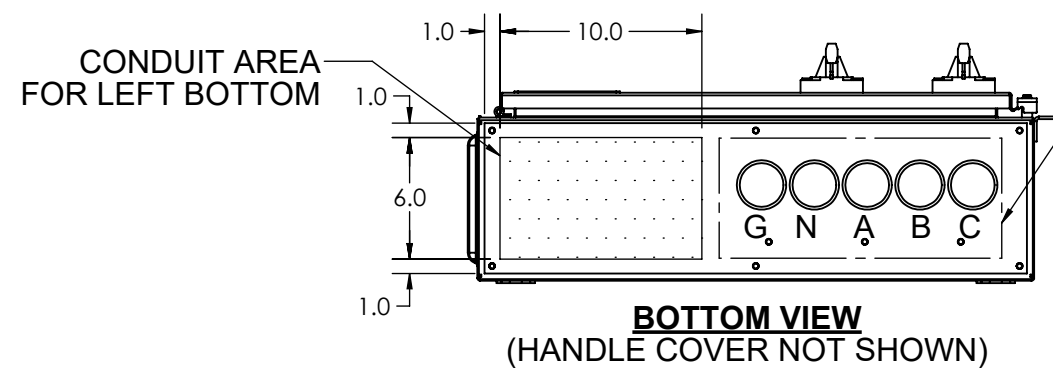


TABLE OF KAIC RATINGS

DISCONNECTS	SHORT CIRCUIT RATING
SWITCH	10 KA
CIRCUIT BREAKER	65KAIC@208VAC
	35KAIC@480VAC
	18KAIC@600VAC

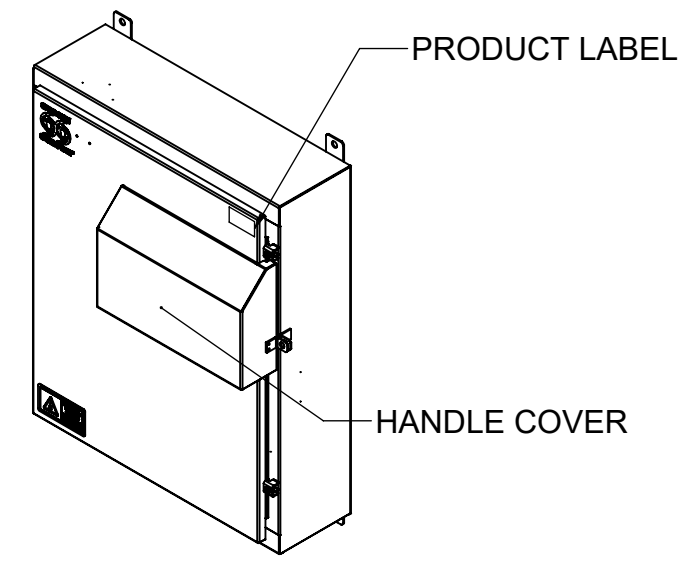

OSHPD # OSP-0582-10
US Patent # 7,462,792

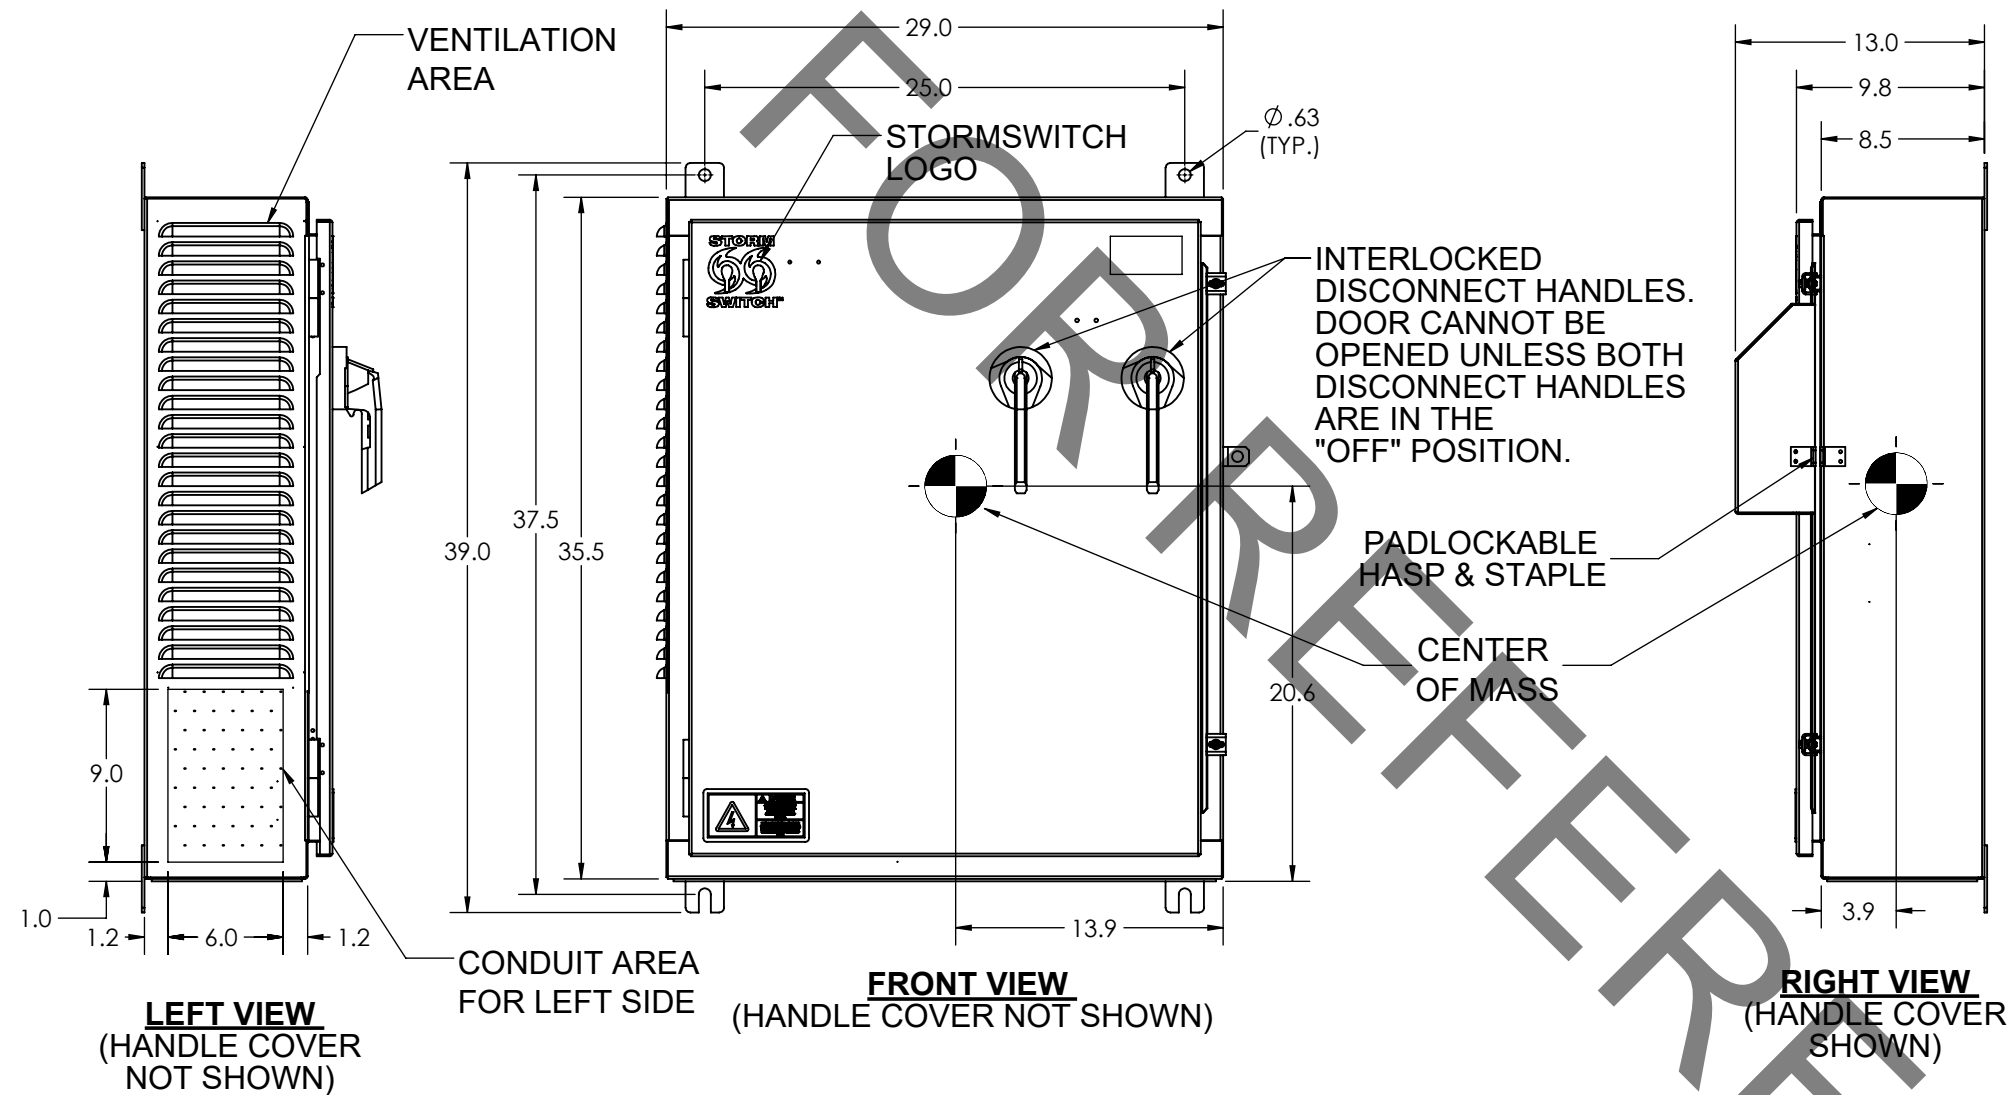

201A-400A 50/60Hz 3 ϕ + N + G
NON-AUTOMATIC TRANSFER SWITCH

ITEM # 3042-SERIES

SERIAL # _____

MFG. DATE: _____

TYPE: 3R

SUITABLE FOR USE AS SERVICE EQUIPMENT IN USA ONLY
Corona, CA <> (800)922-4188 <> (951)739-7000 <> info@eslpwr.com

WEIGHT: 185 Lbs.

MATERIAL:
GALV STEEL
THICKNESS:
14 GAUGE
COLOR/FINISH:
WRINKLE GRAY (RAL 7035)
REFERENCE:
1011-10

ESL POWER SYSTEMS, INC.
CORONA, CALIFORNIA
(951) 739-7000 (800) 922-4188
eslpwr.com - info@eslpwr.com

201A-400A
MANUAL TRANSFER SWITCH
STORMSWITCH
3 PHASES + N + G

PART NUMBER
3042-SERIES


SHEET
1 OF 2

MODEL: 3042-0011

0	MAQ	9/7/2021	FOR REFERENCE
REV.	BY	DATE	DESCRIPTION

NOTES:

1. CONDUIT HUBS AND MOUNTING HARDWARE TO BE SUPPLIED BY OTHERS.

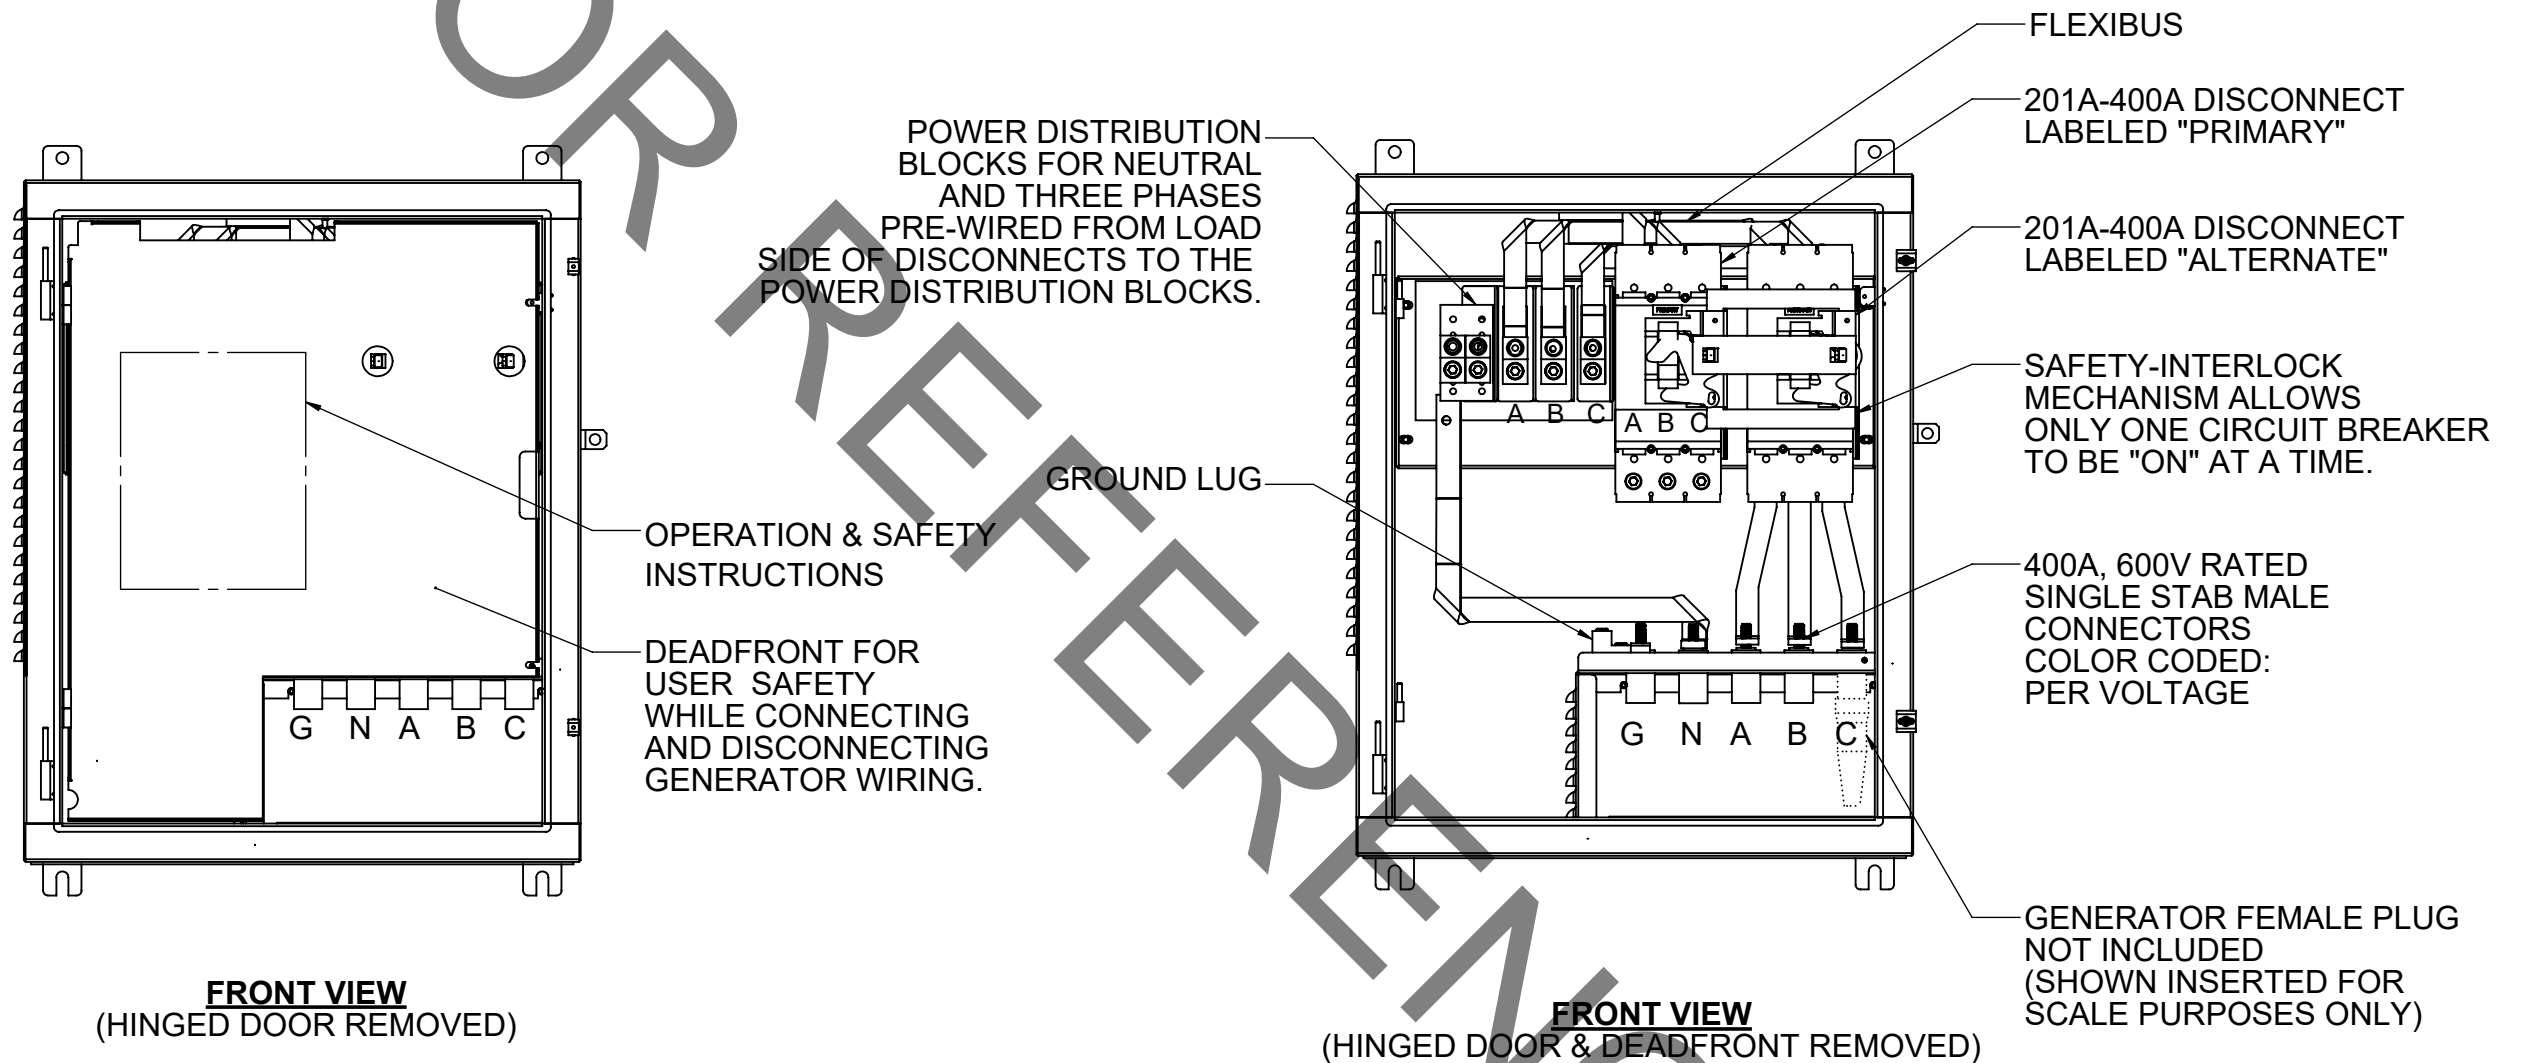

MATERIAL:
GALV STEEL
THICKNESS:
14 GAUGE
COLOR/FINISH:
WRINKLE GRAY (RAL 7035)
REFERENCE:
1011-10

ESL POWER SYSTEMS, INC.
CORONA, CALIFORNIA
(951) 739-7000 (800) 922-4188
eslpwr.com - info@eslpwr.com

WEIGHT: 185 Lbs.	
201A-400A MANUAL TRANSFER SWITCH STORMSWITCH 3 PHASES + N + G	
PART NUMBER 3042-SERIES	SHEET 2 OF 2

MODEL: 3042-0011

0	MAQ	9/7/2021	FOR REFERENCE
REV.	BY	DATE	DESCRIPTION