



APPROVED

BY: _____
DATE: _____
FOR FABRICATION BY ESL


THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WHEREWITH IS NOT TO BE REPRODUCED. USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF ESL.

NOTES:


1. COMPLETE ASSEMBLY IS UL LISTED AS A MANUAL TRANSFER SWITCH UNDER UL 1008 (TRANSFER SWITCH EQUIPMENT)
2. FINISH POWDER COATED SERIES W49. SEE TITLE BLOCK FOR COLOR.
3. NOT FOR INDOOR USE
4. TYPE 3R CONSTRUCTION
5. WIRING SCHEMATIC: 0901-8012 SERIES

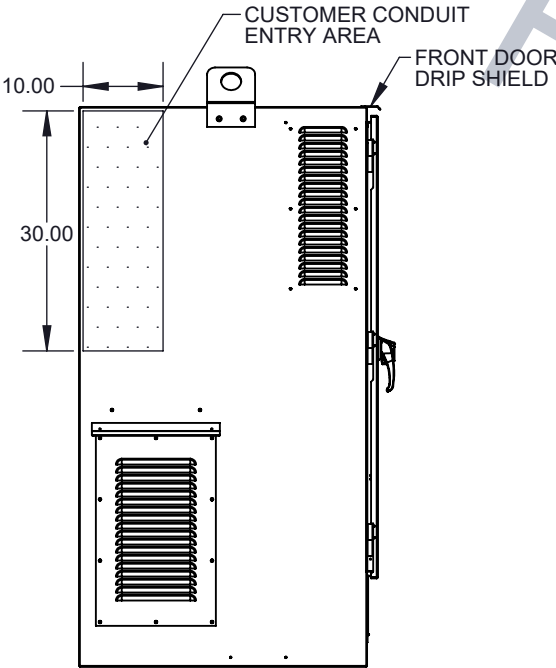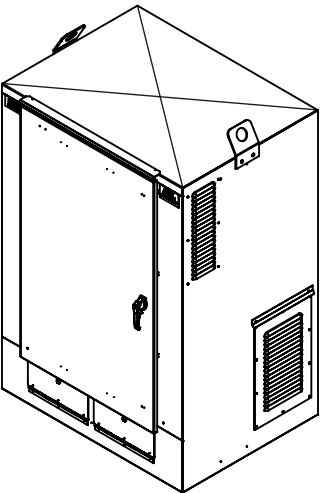


LEFT SIDE VIEW

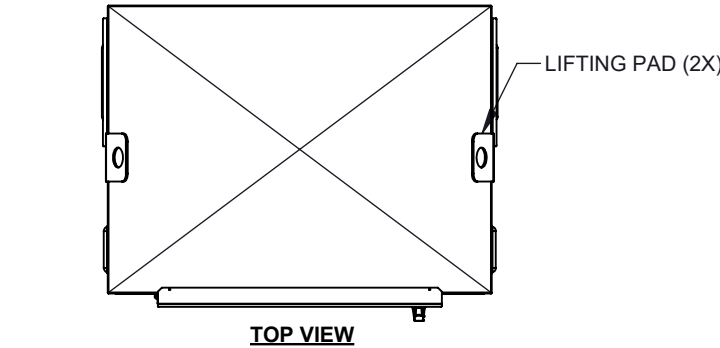


TOP VIEW

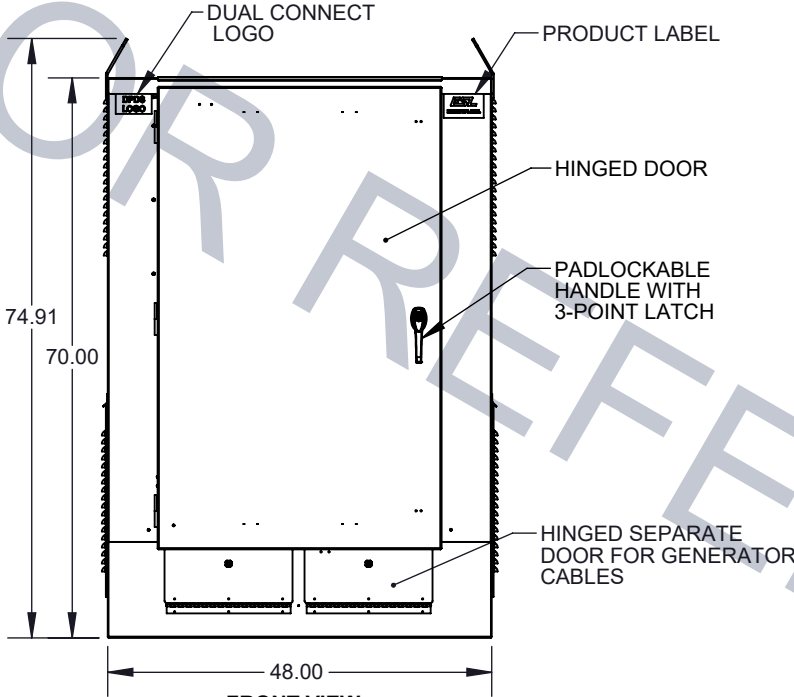

FRONT VIEW

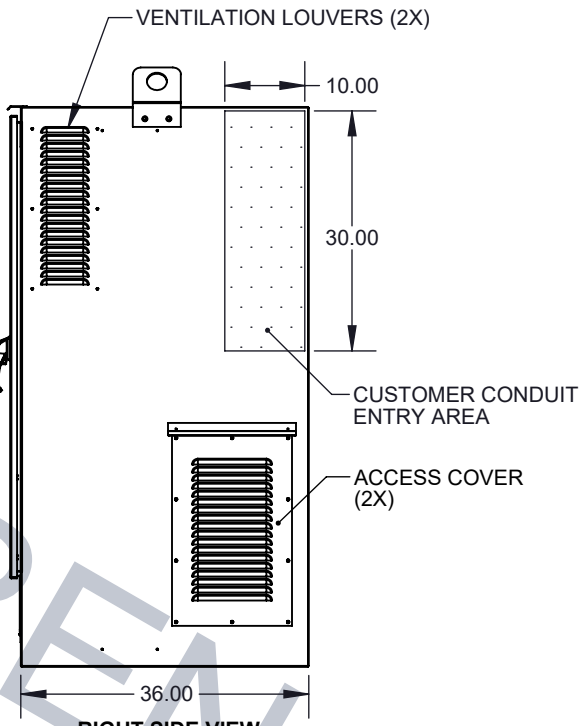

RIGHT SIDE VIEW

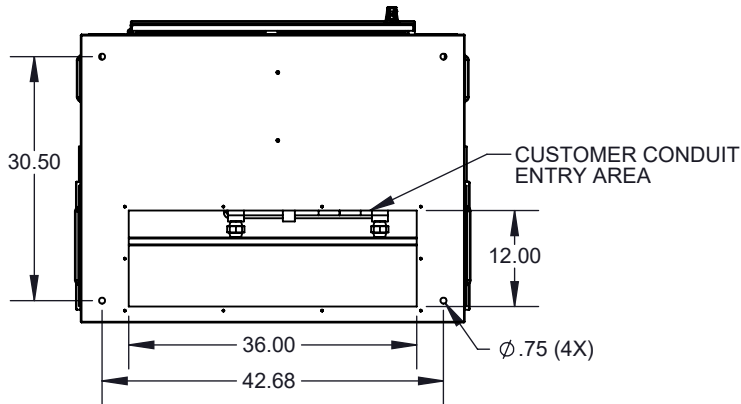

BOTTOM VIEW

ESL
POWER SYSTEMS

UL
4NM1
US LISTED

1 OF 1

1200A 50/60Hz 3 ϕ + N + G
TRANSFER SWITCH ACCESSORY
CAM-STYLE INLET BOX

MFG. DATE:

ITEM # 8012-SERIES

TYPE: 3R

SERIAL # _____

SHORT CIRCUIT CURRENT RATING: 65,000 RMS SYMMETRICAL AMPS
RESISTER NOMINAL DE COURT-CIRCUIT: 65,000 RMS SYMETRIQUES AMPERES
Corona, CA <> (800)922-4188 <> (951)739-7000 <> info@eslpwr.com

QTY= SEE WT / PO

WEIGHT: 891.87 Lbs.

ESL POWER SYSTEMS, INC.
CORONA, CALIFORNIA
(951) 739-7000 (800) 922-4188
eslpwr.com - info@eslpwr.com

DUAL CONNECT
1200A
3 PHASE + N + G

PART NUMBER
8012-0001

SHEET
1 OF 2

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
DECIMALS .XX ±.03
ANGULAR ±1/2°
XXX ±.01
BREAK ALL SHARP EDGES
.005 - .010
DIMENSIONS TO BE HELD AFTER
PLATING AND HEAT TREATING

MATERIAL:
STEEL
THICKNESS:
12 GAUGE
COLOR/FINISH:
WRINKLE GRAY (RAL 7035)
REFERENCE:
1020-004-ASSY

ENGINEER
CHECKED
APPROVAL
DATE
DO NOT SCALE DRAWING

PATH
C:\ESL Vault\8012\

MODEL: 8012-0001

8012-0001


APPROVED

BY: _____
DATE: _____
FOR FABRICATION BY ESL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN
OR WHEREWITH IS NOT TO BE REPRODUCED. USED
OR DISCLOSED IN WHOLE OR IN PART TO ANYONE
WITHOUT THE PERMISSION OF ESL.

NOTES:

1. CONDUIT HUBS AND MOUNTING HARDWARE TO BE
SUPPLIED BY OTHERS.

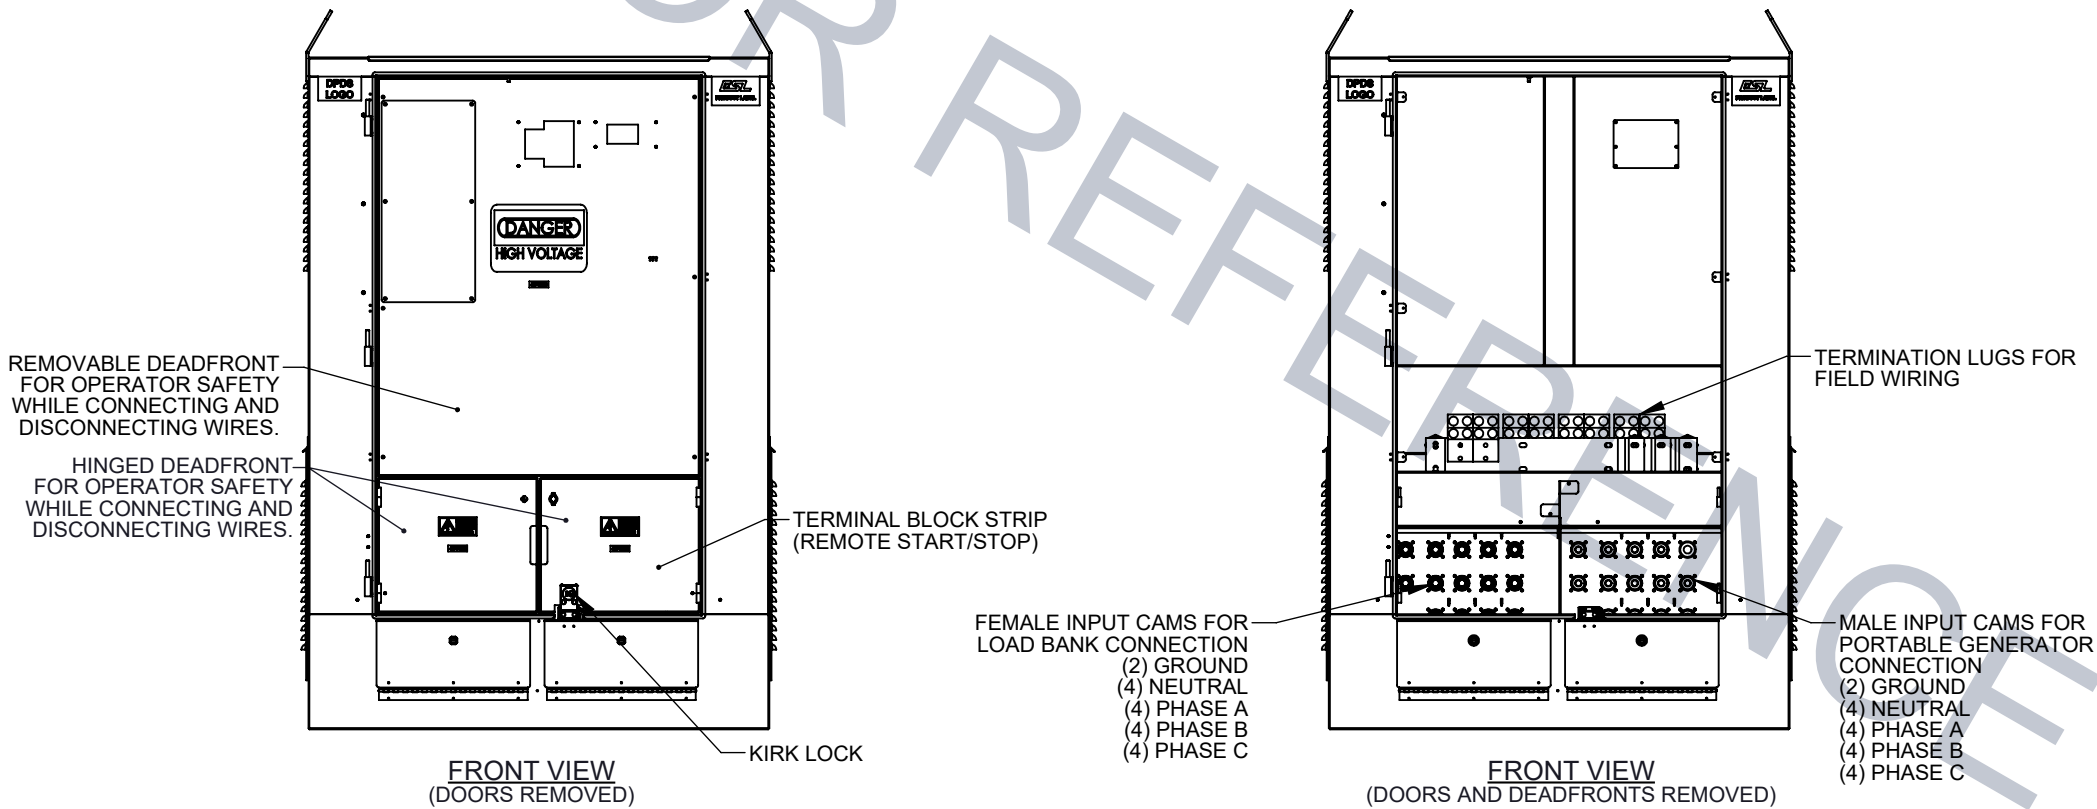

MODEL: 8012-0001

QTY= SEE WT / PO			WEIGHT: 790.31 Lbs.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: DECIMALS .x ±.03 .XX ±.01 .XXX ±.005 BREAK ALL SHARP EDGES .005 - .010	MATERIAL: STEEL	ENGINEER	ESL POWER SYSTEMS, INC. CORONA, CALIFORNIA (951) 739-7000 (800) 922-4188 eslpwr.com - info@eslpwr.com	
	THICKNESS: 12 GAUGE	CHECKED		
	COLOR/FINISH: WRINKLE GRAY (RAL 7035)	APPROVAL		
	REFERENCE: 1020-004-ASSY	DATE	PATH C:\ESL Vault\8012\	PART NUMBER 8012-0001
DIMENSIONS TO BE HELD AFTER PLATING AND HEAT TREATING		DO NOT SCALE DRAWING		SHEET 2 OF 2