THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WHEREWITH IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF ESL.

FOR REFERENCE

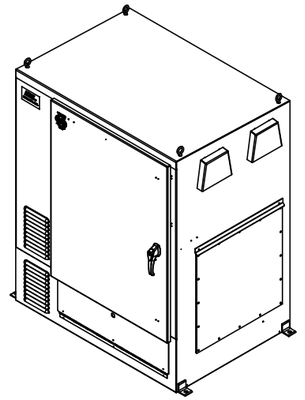

NOTES:

1. FINISH POWDER COAT SERIES W49 PER ESL COATING SPECIFICATION 9910-03. SEE TITLE BLOCK FOR COLOR
2. TYPE 3R CONSTRUCTION
3. NOT FOR INDOOR USE
4. FOAM SEAL INSIDE OF ALL CONDUIT ENTRIES
5. OPTIONAL PLUG KITS AVAILABLE

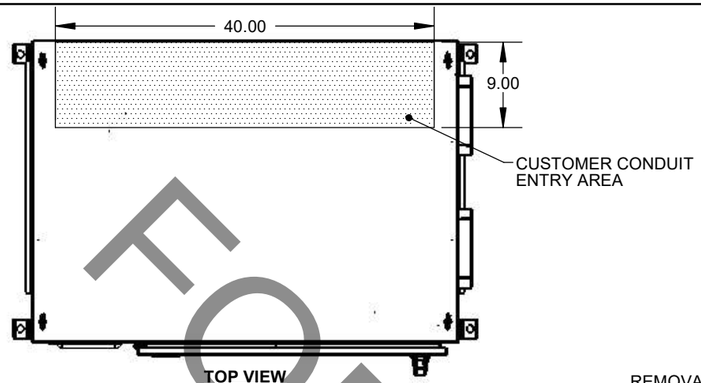

TOP VIEW

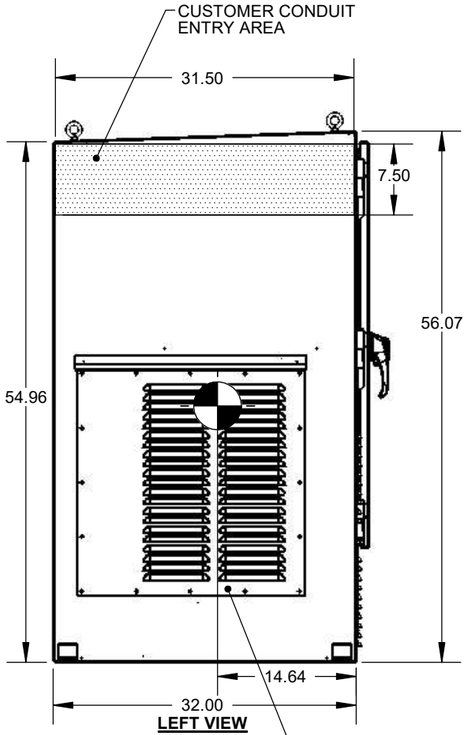

LEFT VIEW

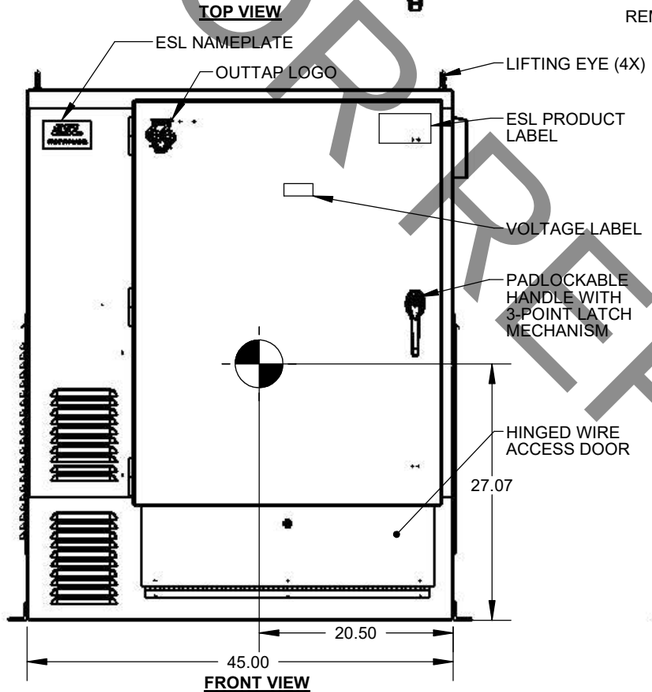

FRONT VIEW

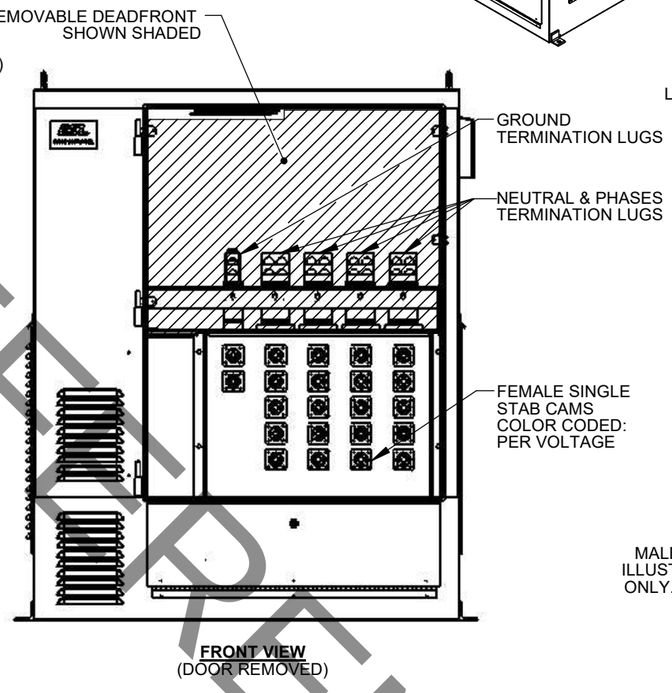

FRONT VIEW
(DOOR REMOVED)

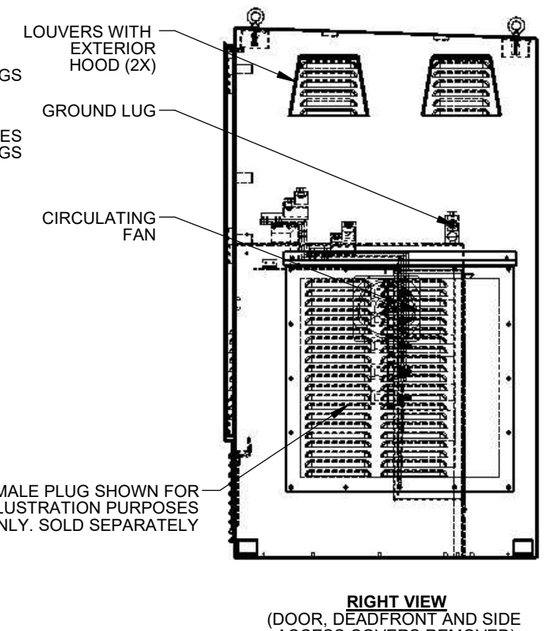

RIGHT VIEW
(DOOR, DEADFRONT AND SIDE ACCESS COVERS REMOVED)

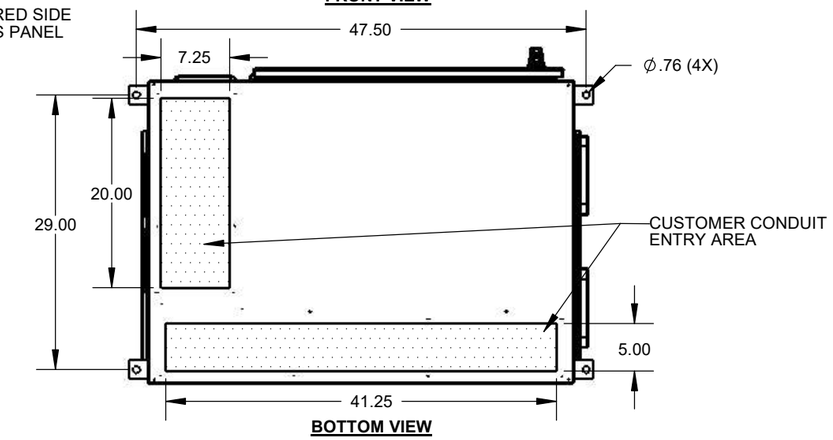

BOTTOM VIEW

OUT 66 TAP®

UL 891 LISTED

ESL POWER SYSTEMS

4PC5

c UL us LISTED

OUTTAP 50/60Hz 3ϕ + N + G

TRANSFER SWITCH ACCESSORY

CAM-STYLE OUTLET BOX

MFG. DATE: _____

ITEM # 3822-SERIES

SERIAL # _____ TYPE:3R

SHORT CIRCUIT WITHSTAND RATING: 42,000 RMS SYMMETRICAL AMPS

RESISTER NOMINAL DE COURT-CIRCUIT: 42,000 RMS SYMETRIQUES AMPERES

Corona, CA <> (800)922-4188 <> (951)739-7000 <> info@eslpwr.com

EST. WEIGHT: 706 Lbs.

MATERIAL:	GALV STEEL
THICKNESS:	12 GAUGE
COLOR:	WRINKLE GRAY (RAL 7035)
REFERENCE:	1190-42

ESL POWER SYSTEMS, INC.
CORONA, CALIFORNIA
(951) 739-7000 (800) 922-4188
eslpwr.com - info@eslpwr.com

PATH

1601-2000A
SINGLE STAB CAM OUTLET BOX
OUTTAP
3 PHASES + N + G

DRAWING NUMBER: 3822-SERIES

SHEET 1 OF 1

MODEL: 3822-SERIES

REV.	BY	DATE	DESCRIPTION
0	MAQ	01/25/2022	FOR REFERENCE